


SANYO
Lithium

Cell Type NBL414R

Specifications

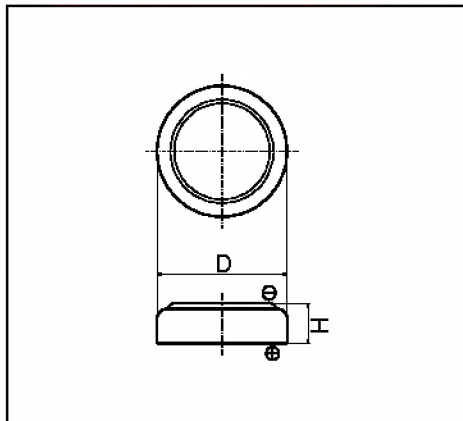

Nominal Capacity ^{*1}	0.5mAh
Nominal Voltage	2V
Standard Charge / Discharge Current	0.005mA
Max. Discharge Current	Continuous ^{*2} 0.02mA
	Pulse ^{*3} 0.05mA
Charge/Discharge Cycle Characteristics	Discharging Depth of 5% 3000
	Discharging Depth of 10% 300
Charging Method	Constant Voltage Charge 1.8V~2.6V
Temperature Range	-20°C~60°C
Weight	0.08g
Dimensions	Diameter(D) 4.8mm
	Height(H) 1.4mm
Max. Reflow Temperature	240°C

*1 Nominal capacity is determined to an end voltage of 1.0V when the battery is allowed to discharge at a standard current level at 23°C.


*2 Current value is determined so that 50% of the nominal capacity is obtained with an end voltage of 1.0V at 23 °C.

*3 Current value for obtaining 1.0V cell voltage when 15sec. pulse is applied at 50% discharge depth at 23 °C.


* NBL414R is capable of reflow soldering. Consult Sanyo about the reflow condition.

Typical Characteristics

Charge Characteristics of NBL414R

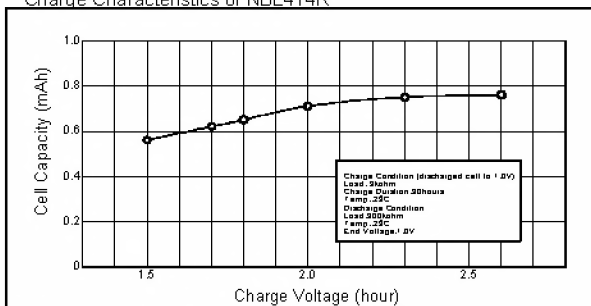

Temperature Characteristics of NBL414R

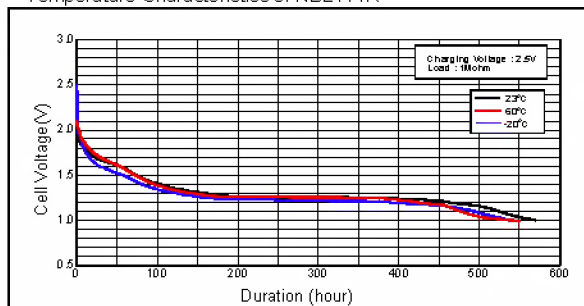

Discharge/Discharge Cycle Characteristics of NBL414R

